



Su socio estratégico en soluciones de control

SISTEMA CARRIER CONFORT NETWORK

3V™ Control System

System Pilot

33PILOT-01



Email

ivupro@anzures.com.ar



Web

anzures.com.ar



Redes sociales



Teléfono


+54 11 6012 5590



Product Specification

3V™ Control System System Pilot

Part Number: 33PILOT-01

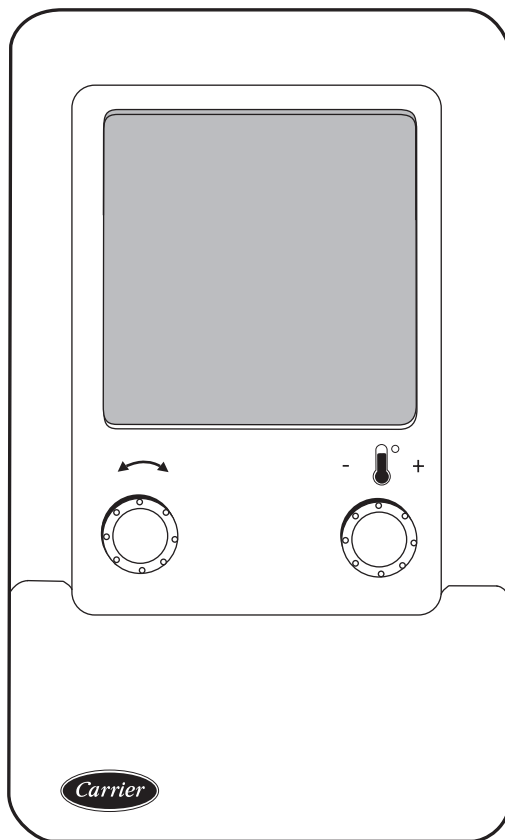

The System Pilot is a component of Carrier's 3V control system and serves as the user-interface and configuration tool for all Carrier communicating devices. The System Pilot can be used to install and commission a 3V zoning system, linkage compatible air source, universal controller, and all other devices operating on the Carrier communicating network.

The System Pilot can serve as a wall-mounted temperature sensor for space temperature measurement. The occupant can use the System Pilot to change set points and cause occupancy overrides. A security feature is provided to limit access of features for unauthorized users.

Features/Benefits

Keypad and display

The System Pilot consists of a backlit alphanumeric Liquid Crystal Display (LCD) with adjustable contrast and back-lighting. It features six pushbuttons and two rotary knobs with pushbuttons that allow the user to navigate through the menus, select desired options, and modify data.

Complete system access

Zone occupant user interface

- Modify zone operating set points during occupied and unoccupied modes
- Provide occupancy override capability
- Display local occupancy status
- Display current operating mode

System interface

- Communicate with Carrier communication network devices

Features/Benefits



- Access configuration, maintenance, service, set point, time schedule, alarm history and status data in Carrier network devices
- Force and auto points in Carrier network devices
- Modify address of Carrier network devices
- Modify time/date in Carrier network devices
- Display metric or customary U.S. units
- Allows four security levels
- Supports foreign languages

Carrier communicating network system

- Broadcast time/date and holiday status
- Support 30 holidays with holiday broadcast
- Generate network alarm messages for trouble conditions
- Provide capability to fully commission 3V™ zoning, air sources and Universal Controllers

→ Control and monitoring

- Display or send space temperature to a specified Carrier network device
- Modify set points in Carrier network devices
- Allow display of 3V linkage coordinator zone controller bus scan information
- Display OAT (outdoor-air temperature) as received from the network
- Provide two types of 3V zone controller access via dedicated local bus or via network bus.
- Allows display of 3V system alternate information

Mounting

The System Pilot can be mounted into a standard 2 x 4-in. junction box. Optional wall plates are also available that allow for flush mounting or for retrofit applications.

Specifications

→ Power Requirements. 24 vac at 6 va (18 to 32 vac)
(50/60 Hz)

Dimensions 6.0 in. H x 3.5 in. W x 1.25 in. D
(150 mm x 87.5 mm x 31.25 mm)

Operating Temperature. . . . 32 F to 104 F (0° C to 40 C)

Storage Temperature -40 F to 140 F (-40 C to 60 C)

Operating Humidity 10% to 95% at 104 F,
non-condensing

Storage Humidity 10% to 41% at 140 F, condensing

Vibration

Performance Vibration:
1.5 G measured at 20 to 300 Hz

Corrosion

Office environment

Approvals


Conforms to guidelines for radiated and conducted emissions for a Class A device as stated in FCC Rules and Regulations Part 15, Subpart J. UL 916, and CE MARK Industrial listed.

Accessories

Wall plate — The 33PILOTFKIT-01 Wall Plate allows the System Pilot to be flush mounted if desired.

NOTE: A standard wall plate comes with the System Pilot. For flush mounting, replace the standard wall plate with the accessory wall plate.

Retrofit wall plate — The 33PILOTRKIT-01 Retrofit Wall Plate is used when upgrading an existing, horizontal mounted thermostat. The retrofit wall plate is used to cover the opening in the wall.

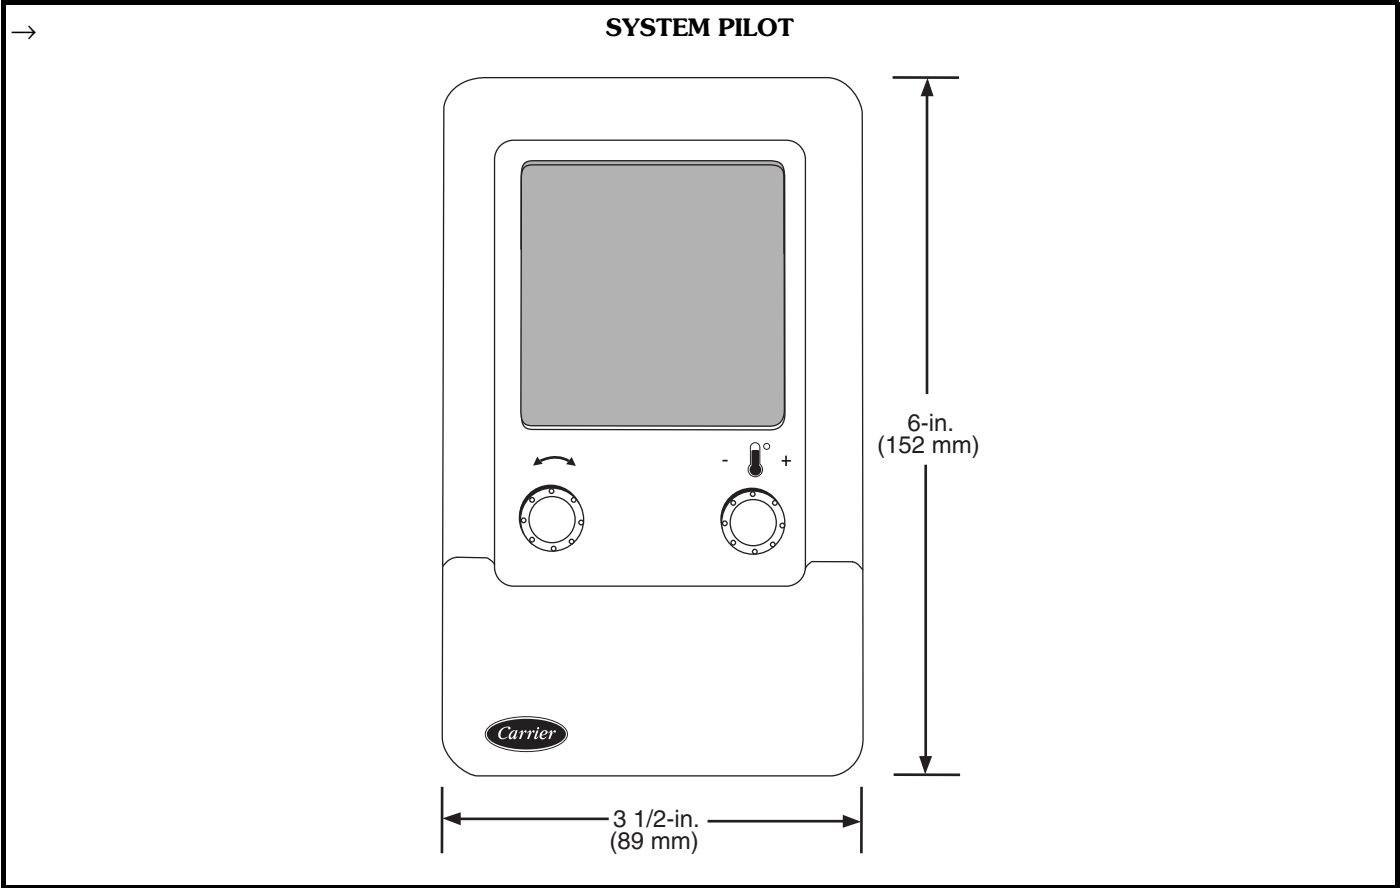



Carrier

A United Technologies Company

Manufacturer reserves the right to discontinue, or change at any time, specifications or designs without notice and without incurring obligations.

Book 1 4
Tab 11a 13a

New Book 1
Tab 1CS1

Pg 4

Catalog No. 523-350

Printed in U.S.A.

PC 111

Form 33ZC-11PS
Replaces: New



Su socio estratégico en
soluciones de control



Conózcenos en nuestra web

Somos expertos en el desarrollo, instalación y mantenimiento de Sistemas de Control. Proveemos soluciones integrales de automatización y control para todo tipo de Edificios Inteligentes.

[Ir a anzures.com.ar](http://anzures.com.ar)



Descubra nuevas soluciones

Conozca nuestra serie de documentos con soluciones integrales que mejoran el control y la eficiencia, y nuestros últimos casos de éxito.


[Ir a anzures.com.ar/soluciones](http://anzures.com.ar/soluciones)



Explore otros equipos

Encuentre los productos necesarios para la gestión de edificios inteligentes o industrias; controladores BACnet HVAC, sistemas Carrier Confort Network, sensores y add-ons.

[Ir a anzures.com.ar/productos](http://anzures.com.ar/productos)

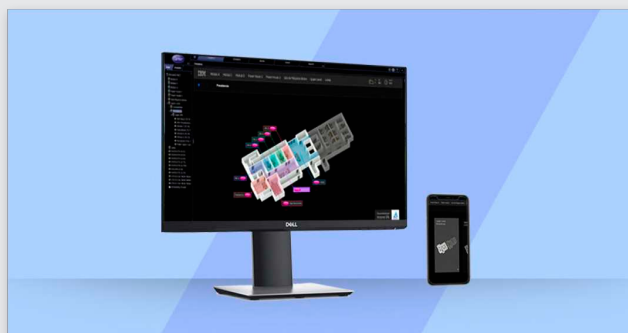

Pruebe nuestra demo i-Vu

Experimente nuestra interfaz gráfica para el control de equipos que se encuentran en los sistemas de edificios e industrias. Interactúe como si fuera un operador mediante el sistema i-Vu.

[Ir a anzures.com.ar/sistema](http://anzures.com.ar/sistema)



Email

ivupro@anzures.com.ar



Web

anzures.com.ar



Redes sociales



Teléfono

+54 11 6012 5590