




Su socio estratégico en soluciones de control

SISTEMA CARRIER CONFORT NETWORK

LonWorks Carrier

Translator

33CNTRANLON-01-R

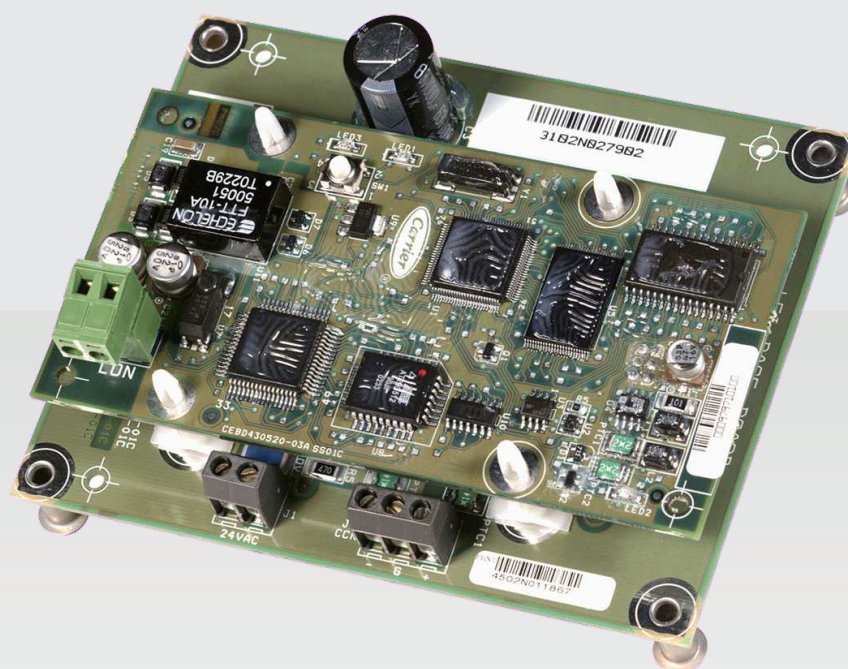

Email

ivupro@anzures.com.ar



Web

anzures.com.ar



Redes sociales



Teléfono

+54 11 6012 5590

LonWorks Carrier Translator

The LonWorks Carrier Translator with LON FT-10A (free topology) communication is a micro controller-based module that provides the ability to integrate Carrier CCN-based controllers into LonWorks-based networks. The LonWorks Carrier Translator (33CNTRANLON) provides CCN to LON FT-10A ANSI/EIA-709.1 protocol conversion.


The Carrier Translator can be mounted in the controls section of any CCN equipment and converts CCN-based controller data to LonWorks. The Carrier Translator is outdoor duty rated and contains a CCN RS-485 connector and a LON FT-10A communications connector.

The LonWorks Carrier Translator can convert Carrier equipment with CCN controls to LON and outputs the CCN data in standard LON Rooftop or Chiller profiles. Carrier rooftop units can be converted to the standard LonMark Rooftop Unit (RTU) Functional profile 8030 Version 1.1. Carrier chillers can be converted to the standard LonMark Chiller Functional profile 8040 Version 1.0. In addition to the rooftop and chiller profiles, a generic LON profile is also supplied. This profile can be used to convert Carrier controllers that may not convert efficiently into the LonMark Rooftop or Chiller profiles.

When connected to a CCN controller, the LonWorks Carrier Translator allows a third party LON device to read and write to the CCN controller's mapped status display, time schedule, and setpoint schedule data. Note that LON status display write access is subject to the CCN equipment controller's defined read/write access for each status display item.

FEATURES

- 2-wire removable LonWorks connector
- 3-wire fixed screw terminal CCN connector
- 2-wire fixed screw terminal Power connector
- Red Processor Status LED
- Yellow CCN Communication Status LED
- Green LON Service LED
- LON Service push button

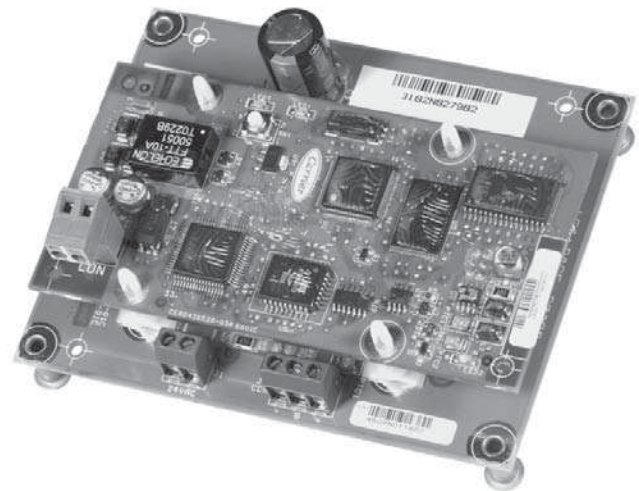

SPECIFICATIONS

Power Requirements	3 VA @ 24 Vac $\pm$ 25%
Dimensions	2.1 in H x 5 in W x 4 in D (53.3 mm x 127 mm x 101.6 mm)
Operating Temperature	-40°F to 158°F (-40°C to 70°C)
Storage Temperature	-40°F to 185°F (-40°C to 85°C)
Operating Humidity	0 to 95%, non-condensing
CCN Communications	9600, 19.2K, 38.4K baud
LonWorks Communications ..	FTT-10A (Free Topology) ANSI/EIA-709.1

Conforms to guidelines for radiated and conducted emissions for a Class A device as stated in FCC Rules and Regulations Part 15, Subpart J.

UL 916 and CE MARK (industrial) listed.



Su socio estratégico en
soluciones de control



Conózcenos en nuestra web

Somos expertos en el desarrollo, instalación y mantenimiento de Sistemas de Control. Proveemos soluciones integrales de automatización y control para todo tipo de Edificios Inteligentes.

[Ir a anzures.com.ar](http://anzures.com.ar)



Descubra nuevas soluciones

Conozca nuestra serie de documentos con soluciones integrales que mejoran el control y la eficiencia, y nuestros últimos casos de éxito.


[Ir a anzures.com.ar/soluciones](http://anzures.com.ar/soluciones)



Explore otros equipos

Encuentre los productos necesarios para la gestión de edificios inteligentes o industrias; controladores BACnet HVAC, sistemas Carrier Confort Network, sensores y add-ons.

[Ir a anzures.com.ar/productos](http://anzures.com.ar/productos)

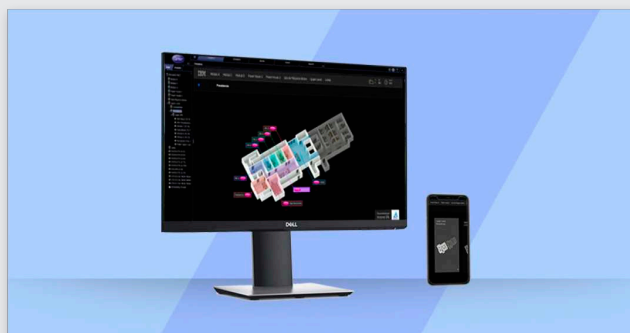

Pruebe nuestra demo i-Vu

Experimente nuestra interfaz gráfica para el control de equipos que se encuentran en los sistemas de edificios e industrias. Interactúe como si fuera un operador mediante el sistema i-Vu.

[Ir a anzures.com.ar/sistema](http://anzures.com.ar/sistema)



Email

ivupro@anzures.com.ar



Web

anzures.com.ar



Redes sociales



Teléfono

+54 11 6012 5590