

Touch Pilot™

33CNTPILOT



Email

ivupro@anzures.com.ar



Web

anzures.com.ar



Redes sociales



Teléfono


+54 11 6012 5590



Product Specification

Touch Pilot™

Part Number: 33CNTPILOT

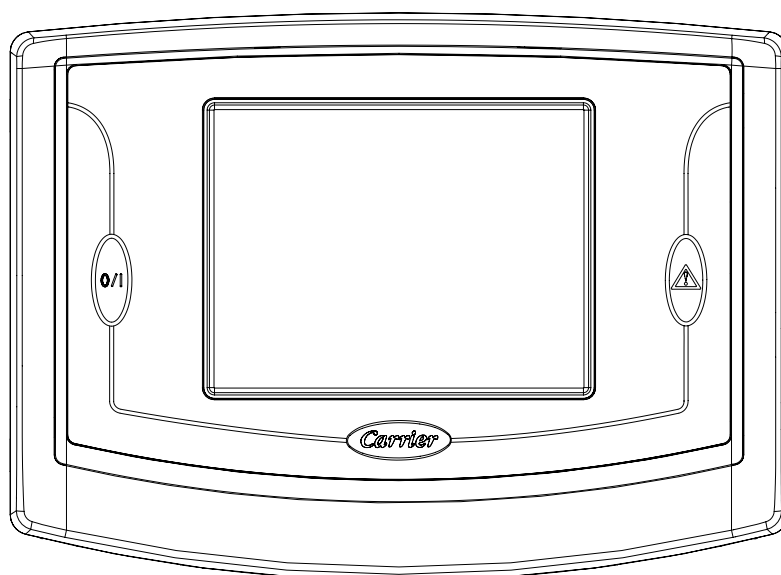

The Touch Pilot is a component of Carrier's control system. It serves as a user interface and configuration tool for Carrier's AquaForce™ and all Carrier communicating devices. The Touch Pilot can be used to install and commission, monitor, and control any device operating on the Carrier network including chillers, 3V zoning systems, and air sources.

Features/Benefits

Keypad and Display

The Touch Pilot consists of a 1/4 VGA Liquid Crystal Display (LCD) with adjustable contrast and backlighting. It features a touch screen panel and display that allows a user to navigate through the menus, select desired options, and modify data.

Complete System Access

System Interface

- Communicate with Carrier network devices
- Supports local equipment mode or network mode
- Network mode allows up to 50 devices in Attach list
- Access configuration, maintenance, service, set point, time schedule, alarm history and status data in Carrier network devices
- Force and auto points in Carrier network devices
- Modify address of Carrier network devices
- Modify time/date in Carrier network devices
- Display metric or customary U.S. units
- Allows three security levels
- Supports foreign languages

Features/Benefits



Carrier Network

- Network alarm acknowledgement and indication
- Provide capability to fully monitor and control chillers, zoning, and air sources

Specifications

Power Requirements . . 24 Vac $\pm$ 6 Vac (18 to 30 Vac)
(47 to 63 Hz)

Dimensions 9.7 in. H x 7.1 in. W x 1.4 in. D
(246.4 mm x 180.3 mm x 35.6 mm)

Operating Temperature . . -4 F to 158 F (-20 C to 70 C)

Storage Temperature . . -22 F to 176 F (-30 C to 80 C)

Operating Humidity 10% to 85% non-condensing
at or below 40 C

10% to 76% non-condensing at 70 C

Storage Humidity 10 to 41% at or below 80 C

Vibration

Performance Vibration 1.0 G
measured at 20 to 300 Hz

Mounting

The Touch Pilot can be wall mounted using four #8 x 1.5 in Phillips panhead screws and four wall anchors (field supplied).

Approvals


UL 873 and CE Mark Industrial listed.

European: 73/23CEE and 93/68CEE, with related harmonized standards: EN 60335-1:1994 (General).

Australian: C-Tick AS/NZS 4251.1.

Conforms to guidelines for radiated and conducted emissions for a Class A device as stated in FCC Rules and Regulations Part 15, Subpart J.

Dimensions

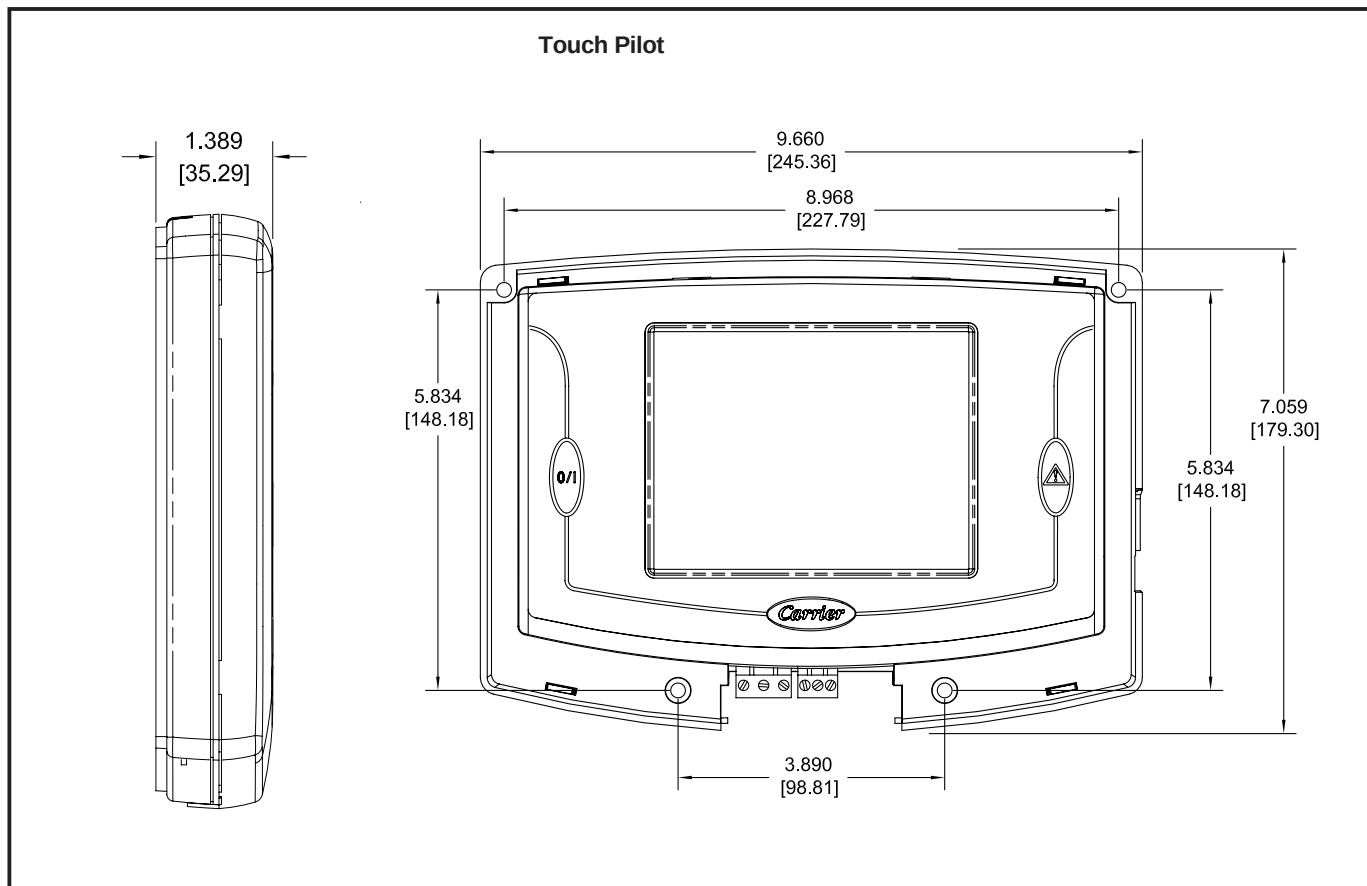



Su socio estratégico en
soluciones de control



Conózcenos en nuestra web

Somos expertos en el desarrollo, instalación y mantenimiento de Sistemas de Control. Proveemos soluciones integrales de automatización y control para todo tipo de Edificios Inteligentes.

[Ir a anzures.com.ar](http://anzures.com.ar)



Descubra nuevas soluciones

Conozca nuestra serie de documentos con soluciones integrales que mejoran el control y la eficiencia, y nuestros últimos casos de éxito.


[Ir a anzures.com.ar/soluciones](http://anzures.com.ar/soluciones)



Explore otros equipos

Encuentre los productos necesarios para la gestión de edificios inteligentes o industrias; controladores BACnet HVAC, sistemas Carrier Confort Network, sensores y add-ons.

[Ir a anzures.com.ar/productos](http://anzures.com.ar/productos)

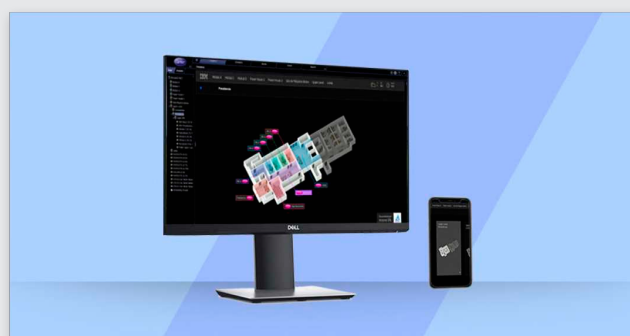

Pruebe nuestra demo i-Vu

Experimente nuestra interfaz gráfica para el control de equipos que se encuentran en los sistemas de edificios e industrias. Interactúe como si fuera un operador mediante el sistema i-Vu.

[Ir a anzures.com.ar/sistema](http://anzures.com.ar/sistema)



Email

ivupro@anzures.com.ar



Web

anzures.com.ar



Redes sociales



Teléfono

+54 11 6012 5590