




Su socio estratégico en soluciones de control

CONTROLADORES BACNET HVAC

TruVu MPCXP1628 Controller

TV-MPCXP1628-NR

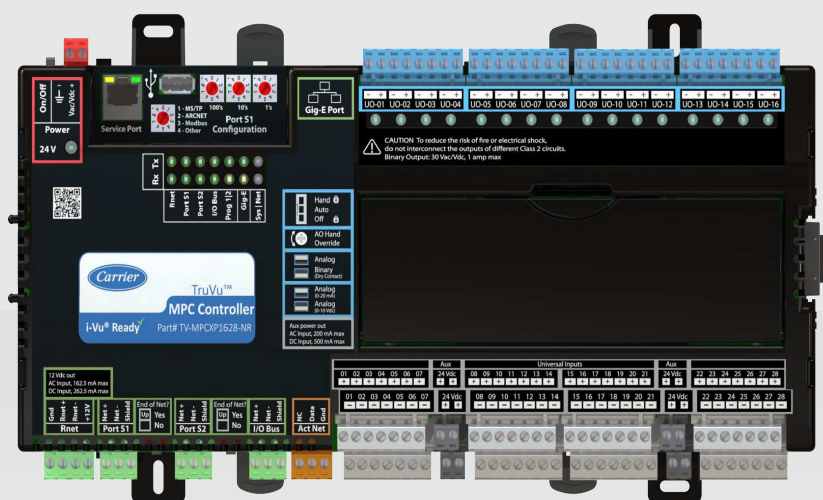

Email

ivupro@anzures.com.ar



Web

anzures.com.ar



Redes sociales



Teléfono

+54 11 6012 5590



i-Vu® Building Automation System TruVu™ MPCXP1628 Controller




Part Numbers: TV-MPCXP1628, TV-MPCXP1628-NR

The i-Vu® Building Automation System provides everything you need to access, manage, and control your building, including the powerful i-Vu user interface, plug-and-play BACnet® controllers, and state-of-the-art Carrier equipment.

The Carrier® TruVu™ MPCXP1628 controller provides multi-purpose monitoring and control for a variety of HVAC system applications. Flexible and versatile, it supports multiple I/O configurations for accomplishing both common and custom HVAC control strategies.

The TruVu MPCXP1628 controller features built-in routing and integration capabilities, 44 universal I/O points, and support for up to nine TruVu MPC I/O expansion modules for a total of 224 hardware control points.

The TruVu MPCXP1628-NR controller has the same features as the TruVu MPCXP1628, but does not support BACnet routing.

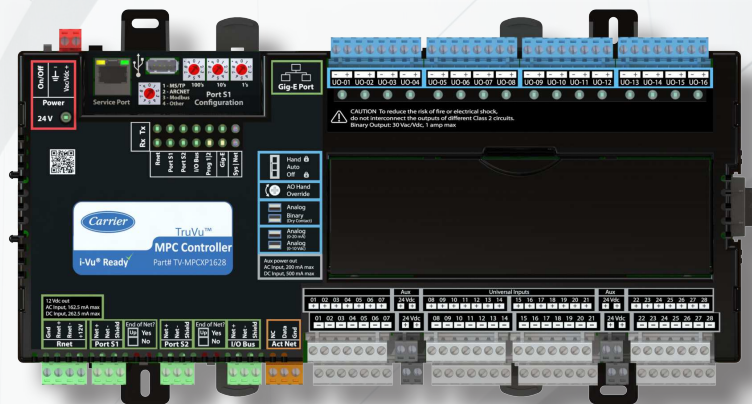

Application Features

- Comprehensive library of factory-engineered control programs available for complete air-side and water-side system control
- Graphically programmable using the Snap programming tool
- Supports Carrier communicating room sensors, which allow for local setpoint adjustment and local overrides

Hardware Features

- Gig-E 1000 Mbps Ethernet port supports BACnet/IP, Modbus TCP/IP and DHCP addressing
- Local access 10/100 Ethernet port for system startup and troubleshooting
- Real-time clock keeps time in the event of power failure for up to 3 days without batteries
- Capable of system or stand-alone operation
- Can be din-rail or screw mounted
- Supports up to 9 TruVu MPC I/O expanders
- Act Net bus supports up to 16 communicating i-Vu smart valves

BACnet Features

- Conforms to the BACnet Building Controller (B-BC), BACnet Router (B-RTR, not applicable to -NR version), and BACnet BBMD (B-BBMD), standard device profiles
- Supports BACnet interoperability and routing with and between BACnet/IP, BACnet MS/TP, and BACnet over ARC156
- High-speed, BACnet over ARC156 communications delivers information quickly and effectively
- Can serve as a BACnet Broadcast Management Device (BBMD)
- Supports BACnet Foreign Device Registration (FDR)

System Benefits

- Fully plug-and-play with the Carrier i-Vu building automation system
- Supports demand limiting and optimal start for maximum energy savings
- Supports up to 1,500 third-party BACnet points and up to 200 Modbus points for system integration



i-Vu[®] Building Automation System

TruVu[™] MPC Controller

Part Numbers: TV-MPCXP1628, TV-MPCXP1628-NR

BACnet Support	Conforms to the BACnet Building Controller (B-BC), BACnet Router (B-RTR, not applicable to -NR version), and BACnet BBMD (B-BBMD) device profiles as defined in BACnet standard 135-2001 Annex L 2012		
Communication Ports	<p>Gig-E: 10/100/1000 BaseT Ethernet port for BACnet/IP and/or BACnet/Ethernet and/or Modbus TCP/IP communication</p> <p>S1 ARC/MSTP: High-speed EIA-485 port with End of Net switch for connecting one of the following:</p> <ul style="list-style-type: none"> • BACnet ARCnet network at 156 kbps or BACnet MS/TP network at 9600 to 115.2 kbps • Modbus RTU at 9600 to 115.2 kbps <p>S2 MSTP: Electrically isolated EIA-485 port with End of Net switch for connecting one of the following:</p> <ul style="list-style-type: none"> • BACnet MS/TP network at 9600 to 115.2 kbps or Modbus RTU at 9600 to 115.2 kbps <p>Service: 10/100 Base T Ethernet port for system start-up and troubleshooting</p> <p>IO Bus port: Provides communication for wired TruVu MPC I/O expanders</p> <p>IO Bus edge connector: 6-pin connector that provides communication and power to a directly-connected TruVu MPC I/O expander</p> <p>Act Net: Communication port for connecting up to 16 smart actuators / valves</p>		
Third Party Integration	Supports up to 1,500 third-party BACnet points and 200 Modbus points (memory dependent).		
Physical	Fire-retardant plastic ABS, UL94-5VA		
Universal Inputs	<p>16 Bit A/D with 28 channels electronically configured to any of the following input types: Dry Contact OR Pulse Counting inputs up to 60Hz OR Voltage (0-10 Vdc) OR Current (0-20 mA) OR Thermistor (Precon Type II 10kΩ OR Precon Type III 10kΩ OR Carrier YSI 5kΩ OR S-5700-850 10kΩ w/ 11kΩ shunt) OR RTD (Platinum RTD TS-8000 1kΩ @ 32°F (0.00385 TCR) OR Platinum RTD 1kΩ @ 32°F (0.00375 TCR) OR Nickel-iron RTD 1kΩ @ 70°F, 699 Ω @ -40°F OR Balco (Nickel-iron) TS8000 RTD 1kΩ @ 70°F, 779 Ω @ -40°F)</p> <p>24VDC auxiliary sensor power: 200mA max. (AC power input) 500 mA max. (DC power input)</p>		
Universal Outputs	<p>D/A Resolution (analog out) 12 bits; 16 channels configurable to any of the following output types: Voltage (0-10 Vdc) OR Current (0-20 mA) OR Relay contacts, potential free, normally open, rated 24VAC/DC @ 1 Amp (resistive) Hand/Auto/Off override switches for all outputs, Potentiometer for manual adjustment of all analog outputs, Status LED for all outputs</p>		
Protection	<p>Two fast acting, 5mm x 20mm glass fuses:</p> <ul style="list-style-type: none"> • A 2.5A fuse for the TV-MPCXP1628's power • A 4A fuse for the I/O bus edge connector <p>The power and network ports comply with the EMC requirements EN50491-5-2.</p>		
Compliance	<p>United States of America: FCC compliant to Title CFR47, Chapter 1, Subchapter A, Part 15, Subpart B, Class B; UL listed to UL916, PAZX, Energy Management Equipment</p> <p>Canada: Industry Canada Compliant, ICES-003, Class A; cUL listed UL 916, PAZX and Energy Management Equipment</p> <p>Europe: EN50491-5-2:2009; Low Voltage Directive: 2014/35/EU; RoHS Compliant: 2011/65/EU</p> <p>Australia and New Zealand: C-Tick Mark, AS/NZS 61000-6-3</p>		
Real Time Clock	Real-time clock keeps track of time in the event of a power failure for up to 3 days.		
Environmental Range	Operating: -40 to 158°F (-40 to 70°C) 10 to 95% RH, non-condensing		
Power Requirements	24VAC ± 15%, 50-60Hz 100 VA power consumption 24VDC ± 10% 48W Single Class 2 source only, 100 VA or less	Mounting Weight Overall Dimensions	DIN rail or screw 2.80 lb. (1.3 kg) Length : 12.75 in. (32.38 cm) Width : 6.95 in. (17.68 cm) Depth : 2.09 in. (5.31 cm)



CONTROLS EXPERT

Tested. Certified. Factory Authorized.

For more information, contact
your local Carrier Controls Expert.

Controls Expert Locator:
www.carrier.com/controls-experts

© 2020 Carrier Cat. No. 11-808-738-01 4/20
Manufacturer reserves the right to discontinue, or change at any time, specifications or designs, without notice and without incurring obligations. Trademarks are properties of their respective companies and are hereby acknowledged.



Su socio estratégico en
soluciones de control



Conózanos en nuestra web

Somos expertos en el desarrollo, instalación y mantenimiento de Sistemas de Control. Proveemos soluciones integrales de automatización y control para todo tipo de Edificios Inteligentes.

[Ir a anzures.com.ar](http://anzures.com.ar)



Descubra nuevas soluciones

Conozca nuestra serie de documentos con soluciones integrales que mejoran el control y la eficiencia, y nuestros últimos casos de éxito.


[Ir a anzures.com.ar/soluciones](http://anzures.com.ar/soluciones)



Explore otros equipos

Encuentre los productos necesarios para la gestión de edificios inteligentes o industrias; controladores BACnet HVAC, sistemas Carrier Confort Network, sensores y add-ons.

[Ir a anzures.com.ar/productos](http://anzures.com.ar/productos)

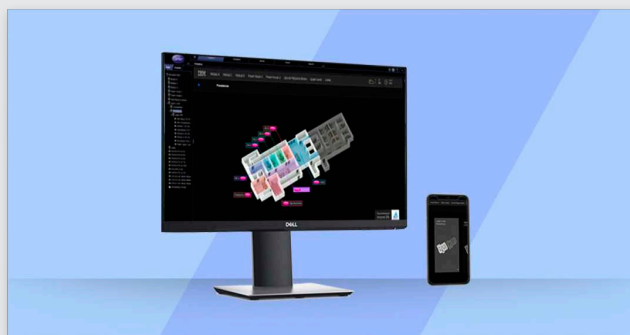

Pruebe nuestra demo i-Vu

Experimente nuestra interfaz gráfica para el control de equipos que se encuentran en los sistemas de edificios e industrias. Interactúe como si fuera un operador mediante el sistema i-Vu.

[Ir a anzures.com.ar/sistema](http://anzures.com.ar/sistema)



Email

ivupro@anzures.com.ar



Web

anzures.com.ar



Redes sociales



Teléfono

+54 11 6012 5590