



Su socio estratégico en soluciones de control

SENSORES

Temperature Sensor

T - 56



Email

ivupro@anzures.com.ar



Web

anzures.com.ar



Redes sociales



Teléfono

+54 11 6012 5590

T-56 SPACE TEMPERATURE SENSOR WITH OVERRIDE AND SETPOINT ADJUSTMENT

The T-56 Space Temperature Sensor with Override and Setpoint Adjustment is designed to complement any interior decor. The sensor has the following advantages over conventional thermostats:

- Elimination of drift and calibration
- Reduced maintenance cost
- Accurate temperature sensing

The T-56 Space Temperature Sensor package consists of:

- (1) Space Temperature Sensor
- (2) 6-32" x 1" round head machine screws
- (1) Installation Instructions

The sensor's override button and temperature offset slide are provided for the control of features in the device to which the sensor is connected. The corresponding features must be present and enabled in the device to which the sensor is connected in order for the button and/or slide to have any effect.

The sensor's integral override button allows a tenant to signal a request for an override of the occupancy schedule currently controlling the HVAC equipment in that zone.

The sensor's integral temperature slide switch allows an occupant to adjust (bias) the heating and cooling setpoints upward and downward by a configured amount.

To support its temperature sensing, override, and setpoint adjustment functions, the sensor must be connected by a twisted, three-conductor, shielded cable to the CCN controller that it serves.

The sensor also includes a communication port for connection of a CCN Network Service Tool. A Network Service Tool connected to that port can communicate with all system elements on the CCN Communication



Bus. Use of the communication port for the Network Service Tool requires an additional three-conductor shielded cable.

SENSOR APPLICATIONS

The wall sensor is used typically with the CCN Comfort Controller or ComfortID Zone Controller for temperature sensing, remote timed override and setpoint bias. Base setpoints for cooling and heating are set by the CCN ComfortVIEW or ComfortWORKS operator.

When used with CCN controllers that support timed override, the T-56 Space Temperature Sensor provides the following:

- Electronic measurement of space temperature
- Occupancy override by pushing the override button

The Tenant Billing Option can be used in conjunction with the CCN controllers to keep track of timed overrides initiated with the T-56 Space Temperature Sensor. Tenant Billing tracks a tenant's after-hours usage of a CCN system.



SPECIFICATIONS

Connections labeled screw terminals
Operating Temperature 32°F to 120°F
(0°C to 49°C)
Storage Temperature -40°F to 160°F
(-40°C to 70°C)
Humidity 0% to 95%, non-condensing
Dimensions 4.51 in H X 2.75 in W X 1.15 in D
(11.46 cm X 6.98 cm X 2.92 cm)
Color beige

THERMISTOR SPECIFICATIONS

Zero Power Resistance 10K Ohms @ 25°C
Tolerance +/- 0.2°C from 0 to 70°C
Dissipation constant 3 mWatt/°C
Thermal time constant 10 seconds
(for 63.2 % step change)

SETPOINT ADJUSTMENT SPECIFICATIONS

Cool 0 Ohms (nominal)
Center 50K Ohms (nominal)
Heat 100K Ohms (nominal)



Su socio estratégico en
soluciones de control



Conózcenos en nuestra web

Somos expertos en el desarrollo, instalación y mantenimiento de Sistemas de Control. Proveemos soluciones integrales de automatización y control para todo tipo de Edificios Inteligentes.

[Ir a anzures.com.ar](http://anzures.com.ar)



Descubra nuevas soluciones

Conozca nuestra serie de documentos con soluciones integrales que mejoran el control y la eficiencia, y nuestros últimos casos de éxito.


[Ir a anzures.com.ar/soluciones](http://anzures.com.ar/soluciones)



Explore otros equipos

Encuentre los productos necesarios para la gestión de edificios inteligentes o industrias; controladores BACnet HVAC, sistemas Carrier Confort Network, sensores y add-ons.

[Ir a anzures.com.ar/productos](http://anzures.com.ar/productos)

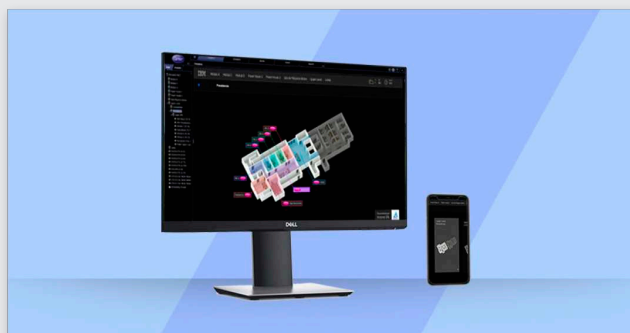

Pruebe nuestra demo i-Vu

Experimente nuestra interfaz gráfica para el control de equipos que se encuentran en los sistemas de edificios e industrias. Interactúe como si fuera un operador mediante el sistema i-Vu.

[Ir a anzures.com.ar/sistema](http://anzures.com.ar/sistema)



Email

ivupro@anzures.com.ar



Web

anzures.com.ar



Redes sociales



Teléfono

+54 11 6012 5590